


FE045-SD_.4F._7

Leistungsdaten Performance data

3~ 400V ±10% Δ/Y 50Hz

P ₁	0,19/0,11	kW
I	0,51/0,26	A
n	910/660	min ⁻¹
I _A	1,35/0,45	A
ΔI	0	%
C _{400V/Komp. *)}	1,5	μF
t _R	70	°C


Kennliniendaten Characteristic data

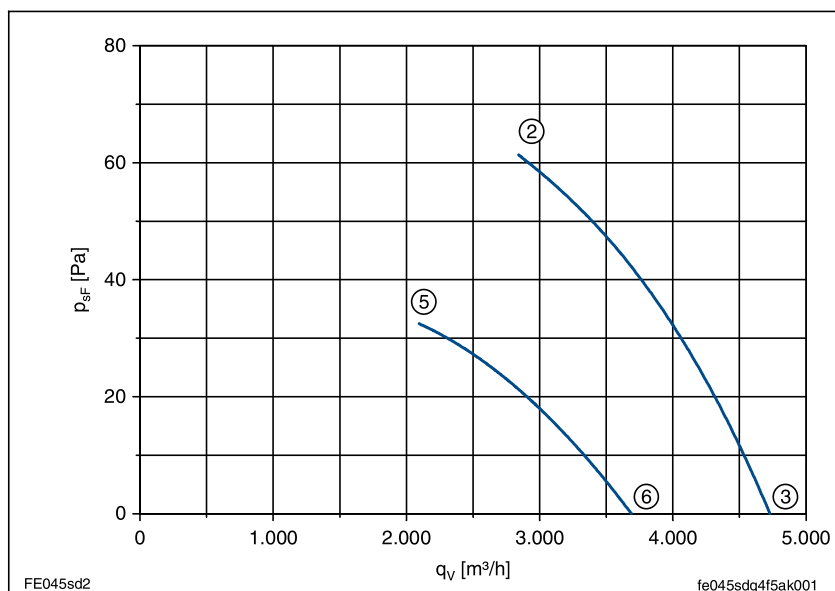

	U	I	P ₁	n
	V	A	W	min
②	400	0,51	190	910
③	Δ	0,48	165	920
⑤	400	0,26	110	660
⑥	Y	0,25	105	730

FE

$$p_{d2} = 1,8 \cdot 10^{-6} \cdot q_v^2$$

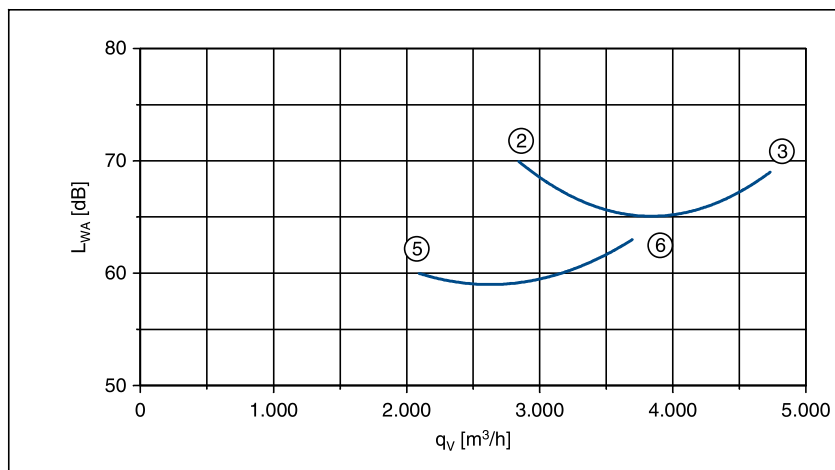

gemessen in Volldüse ohne
Berührungsschutz in Ein-
bauart A nach ISO 5801
measured in full bell mouth
without guard grille in
installation type A according
to ISO 5801

*) Kompensationskondensator,
siehe Allgemeine Hinweise/
Geräuschfilter
Compensation capacitor, see
Technical description/
Noise filter

Maßblatt / Dimension sheet

Typ type	Artikel-Nr. article no.	Bauform design	Luftförderrichtung airflow direction	Gewicht weight	Anschlussschaltbild connection diagram	Maßblatt dimension sheet	Seite page
FE045-SDA.4F.A7	124 708	A	A	9,1 kg	108XB	L-KL-8723	2/2/3
FE045-SDQ.4FA7	132 390	Q	A	13,6 kg	108XB	L-KL-8724	2/2/6
FE045-SDA.4F.V7	123 989	A	V	9,1 kg	108XA	L-KL-8725	2/2/9
FE045-SDK.4F.V7	108 252	K	V	11,0 kg	108XA	L-KL-8726	2/2/15
FE045-SDQ.4F.V7	109 532	Q	V	14,0 kg	108XA	L-KL-8727	2/2/21
FE045-SDF.4F.V7	134 746	F*	V	13,4 kg	108XA	L-KL-8736	2/2/25
FE045-SDF.4F.V7	132 397	F**	V	14,0 kg	108XA	L-KL-8728	2/2/30

* ohne Berührungsschutz / without guard grille

** mit Berührungsschutz / with guard grille