

FE2owlet


FN045-VD_.4F_.7P1

Leistungsdaten Performance data

3~ 400V ±10% Δ/Y 50Hz


P_1	0,54/0,37	kW
I	1,10/0,68	A
n	1350/1020	min ⁻¹
I_A	3,8/2,6	A
ΔI	10	%
t_R	70	°C

Kennliniendaten Characteristic data

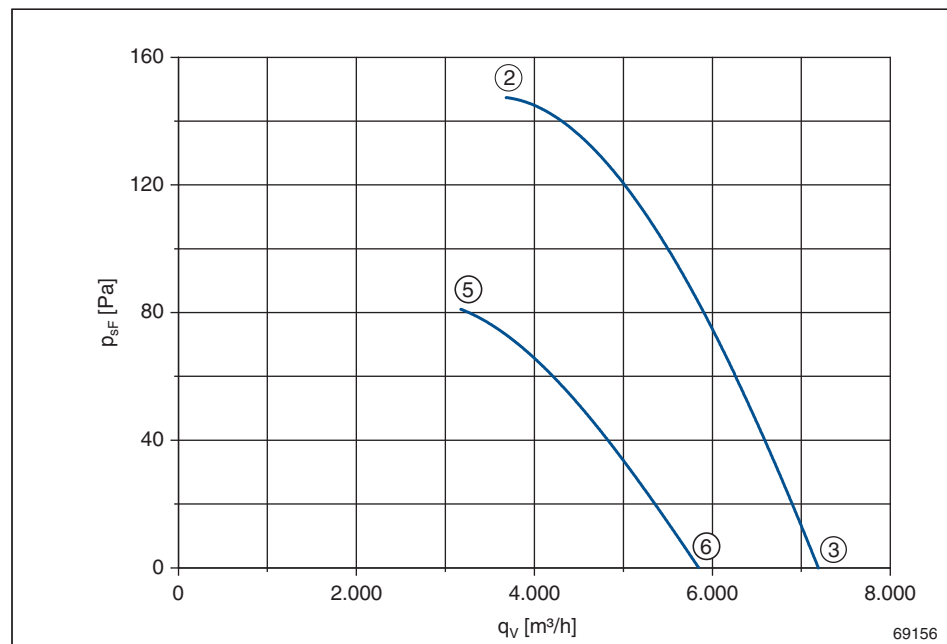

	U V	I A	P ₁ W	n min ⁻¹
②	400	1,10	540	1350
③	Δ	0,96	450	1390
⑤	400	0,68	370	1020
⑥	Y	0,60	330	1130

$$p_{d2} = 1,8 \cdot 10^{-6} \cdot q_v^2$$

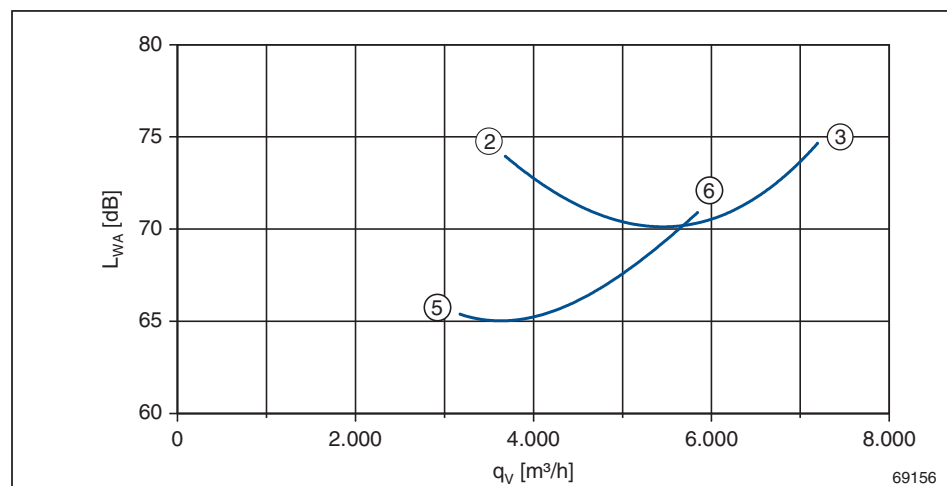

gemessen in Volldüse ohne
Berührschutz in Einbauart A
nach ISO 5801
measured in full bell mouth without
guard grille in installation type A
according to ISO 5801

Maßblatt / Dimension sheet

Typ Type	Artikel-Nr. Article no.	Bauform Design	Luftförderichtung Airflow direction	Gewicht Weight	Anschlussschaltbild Connection diagram	Maßblatt Dimension sheet	Seite Page
FN045-VDA.4F.A7P1	140 102	A	A	9,1 kg	108XB	L-KL-2656	26
FN045-VDQ.4F.A7P1	140 106	Q	A	15 kg	108XB	L-KL-2660	27
FN045-VDA.4F.V7P1	140 092	A	V	9,1 kg	108XA	L-KL-2657	28
FN045-VDK.4F.V7P1	140 110	K	V	11 kg	108XA	L-KL-2659	29
FN045-VDQ.4F.V7P1	140 114	Q	V	14 kg	108XA	L-KL-2661	30
FN045-VDF.4F.V7P1	140 118	F*	V	14 kg	108XA	L-KL-2662	31
FN045-VDF.4F.V7P1	140 538	F**	V	15 kg	108XA	L-KL-2658	32

* ohne Berührschutz / without guard grille

** mit Berührschutz / with guard grille