

FE2owlet


FN045-SD_.4F_.7P1

Leistungsdaten Performance data

3~ 400V ±10% Δ/Y 50Hz


P_1	0,18/0,10	kW
I	0,49/0,25	A
n	900/630	min ⁻¹
I_A	1,23/0,71	A
ΔI	0	%
t_R	70	°C

Kennliniendaten Characteristic data

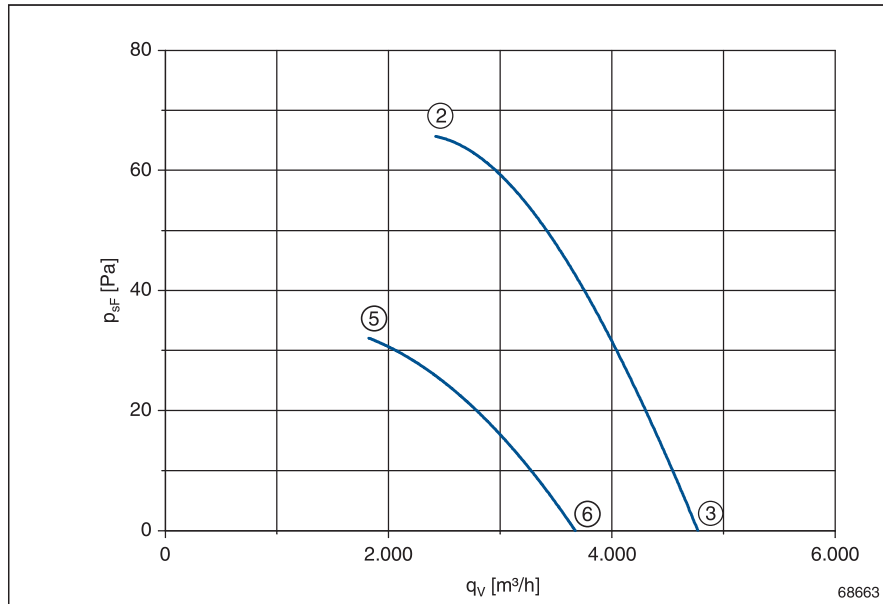

	U V	I A	P ₁ W	n min ⁻¹
②	400	0,49	180	900
③	Δ	0,46	150	920
⑤	400	0,25	100	630
⑥	Y	0,24	96	710

$$p_{d2} = 1,8 \cdot 10^{-6} \cdot q_v^2$$

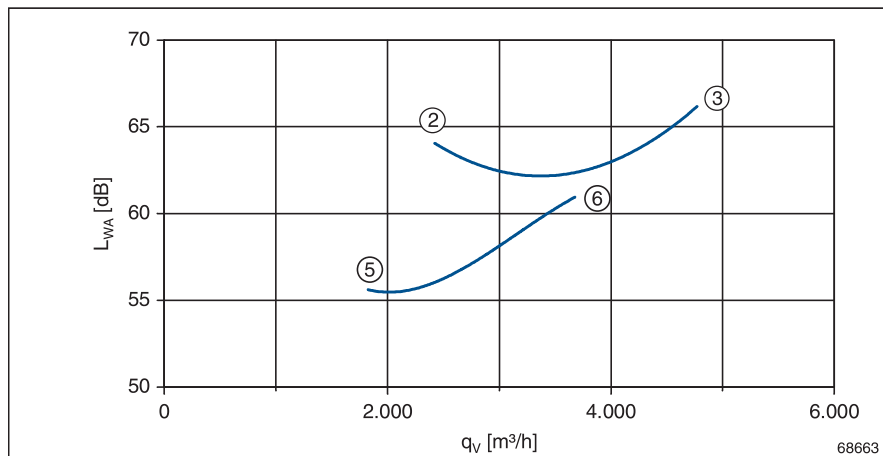

gemessen in Volldüse ohne
Berührschutz in Einbauart A
nach ISO 5801
*measured in full bell mouth without
guard grille in installation type A
according to ISO 5801*

Maßblatt / Dimension sheet

Typ Type	Artikel-Nr. Article no.	Bauform Design	Luftförderichtung Airflow direction	Gewicht Weight	Anschlusschaltbild Connection diagram	Maßblatt Dimension sheet	Seite Page
FN045-SDA.4F.A7P1	140 104	A	A	9,1 kg	108XB	L-KL-2656	26
FN045-SDQ.4F.A7P1	140 108	Q	A	15 kg	108XB	L-KL-2660	27
FN045-SDA.4F.V7P1	140 100	A	V	9,1 kg	108XA	L-KL-2657	28
FN045-SDK.4F.V7P1	140 112	K	V	11 kg	108XA	L-KL-2659	29
FN045-SDQ.4F.V7P1	140 116	Q	V	14 kg	108XA	L-KL-2661	30
FN045-SDF.4F.V7P1	140 120	F*	V	14 kg	108XA	L-KL-2662	31
FN045-SDF.4F.V7P1	140 540	F**	V	15 kg	108XA	L-KL-2658	32

* ohne Berührschutz / without guard grille

** mit Berührschutz / with guard grille