

FE2owlet


FN045-4E_.4I_.7P1

Leistungsdaten Performance data

1~ 230V ±10% 50Hz


P_1	0,55	kW
I	2,5	A
n	1320	min ⁻¹
I_A	6,3	A
ΔI	5	%
C_{400V}	14	µF
t_R	70	°C

Kennliniendaten Characteristic data

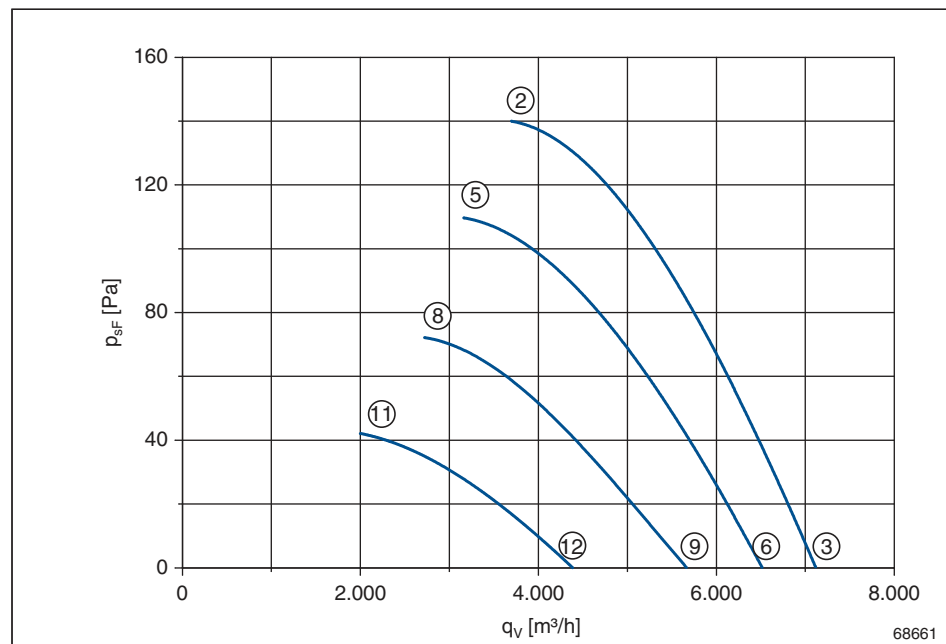

	U V	I A	P ₁ W	n min ⁻¹
②	230	2,5	550	1320
③		2,2	480	1360
⑤	170	2,6	430	1170
⑥		2,2	380	1250
⑧	135	2,6	340	950
⑨		2,3	310	1090
⑪	110	2,4	240	720
⑫		2,2	230	850

$$p_{d2} = 1,8 \cdot 10^{-6} \cdot q_V^2$$

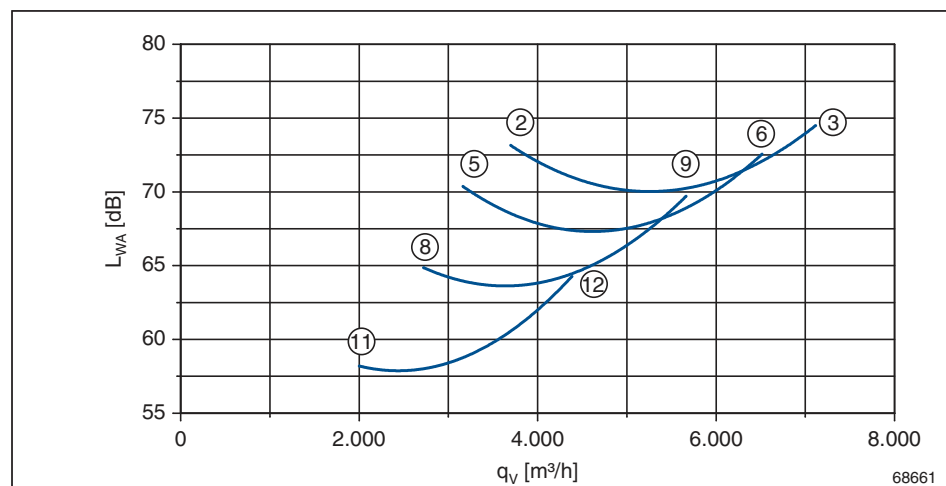

gemessen in Volldüse ohne
Berührschutz in Einbauart A
nach ISO 5801
measured in full bell mouth without
guard grille in installation type A
according to ISO 5801

Maßblatt / Dimension sheet

Typ Type	Artikel-Nr. Article no.	Bauform Design	Luftförderichtung Airflow direction	Gewicht Weight	Anschlussschaltbild Connection diagram	Maßblatt Dimension sheet	Seite Page
FN045-4EA.4I.A7P1	140 103	A	A	11 kg	104XB	L-KL-2656	26
FN045-4EQ.4I.A7P1	140 107	Q	A	16 kg	104XB	L-KL-2660	27
FN045-4EA.4I.V7P1	140 099	A	V	11 kg	104XA	L-KL-2657	28
FN045-4EK.4I.V7P1	140 111	K	V	13 kg	104XA	L-KL-2659	29
FN045-4EQ.4I.V7P1	140 115	Q	V	16 kg	104XA	L-KL-2661	30
FN045-4EF.4I.V7P1	140 119	F*	V	16 kg	104XA	L-KL-2662	31
FN045-4EF.4I.V7P1	140 539	F**	V	16 kg	104XA	L-KL-2658	32

* ohne Berührschutz / without guard grille

** mit Berührschutz / with guard grille