


FB056-VD_.4l_.4L

Leistungsdaten Performance data

3~ 400V ±10% Δ/Y 50Hz

P ₁	0,84/0,64	kW
I	1,65/1,05	A
n	1360/1090	min ⁻¹
I _A	6,0/2,0	A
ΔI	10	%
C _{400V/Komp. *)}	5	μF
t _R ②	40	°C
t _R ⑤	50	°C

Kennliniendaten Characteristic data

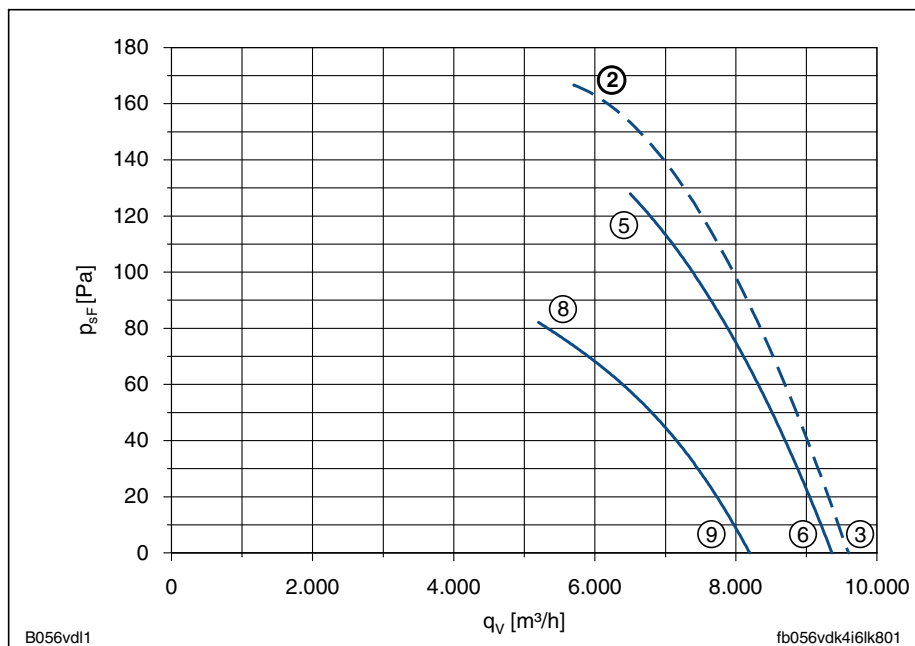

	U	I	P ₁	n
	V	A	W	min ⁻¹
②	400	1,65	840	1360
③	Δ	1,25	570	1410
⑤	400	1,45	760	1370
⑥	Δ	1,2	540	1420
⑧	400	0,97	580	1110
⑨	Y	0,76	450	1230

$$p_{d2} = 7,7 \cdot 10^{-7} \cdot q_v^2$$

--- gemessen in Voldüse ohne Berührungsschutzgitter in Einbauart A nach ISO 5801
measured in full bell mouth without guard grille in installation type A according to ISO 5801

— gemessen in Kurzdüse mit druckseitigem Berührungsschutzgitter
measured in short bell mouth with guard grille on the pressure side

*) Kompensationskondensator, siehe Allgemeine Hinweise/ Geräuschfilter
Compensation capacitor, see Technical description/ Noise filter

	②	③	⑤	⑥	⑧	⑨
L _{WA}		79	80	80	76	77
dB						

Maßblatt / Dimension sheet

Type	Artikel-Nr. article no.	Bauform design	Luftförderrichtung airflow direction	Gewicht weight	Anschlussschaltbild connection diagram	Maßblatt dimension sheet	Seite page
FB056-VDA.4l.A4L	132 415	A	A	9,5 kg	108XB	L-KL-8804	6/2/2
FB056-VDW.4l.A4L	127 411	W	A	12,3 kg	108XB	L-KL-8805	6/2/4
FB056-VDA.4l.V4L	124 701	A	V	9,5 kg	108XA	L-KL-8806	6/2/7
FB056-VDK.4l.V4L	124 384	K	V	12,3 kg	108XA	L-KL-8807	6/2/10