

FE2owlet


FN063-SD_.4I_.7P1

Leistungsdaten Performance data

3~ 400V ±10% Δ/Y 50Hz


P_1	0,63/0,44	kW
I	1,25/0,73	A
n	900/720	min ⁻¹
I_A	4,9/2,8	A
ΔI	15	%
t_R	70	°C

Kennliniendaten Characteristic data

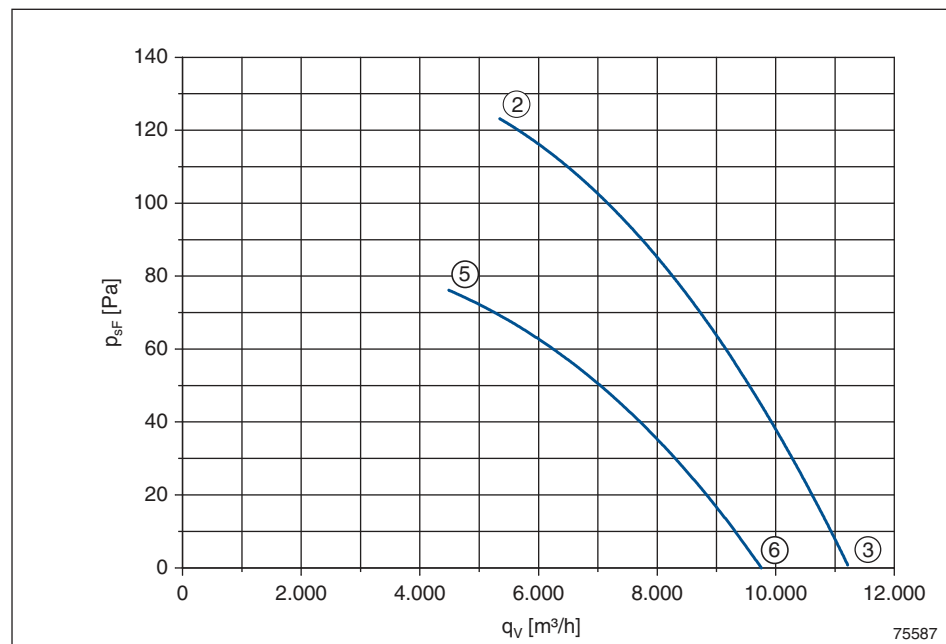

	U V	I A	P ₁ W	n min ⁻¹
②	400	1,25	630	900
③	Δ	1,05	440	940
⑤	400	0,73	440	720
⑥	Y	0,56	330	820

$$p_{d2} = 4,6 \cdot 10^{-7} \cdot q_v^2$$

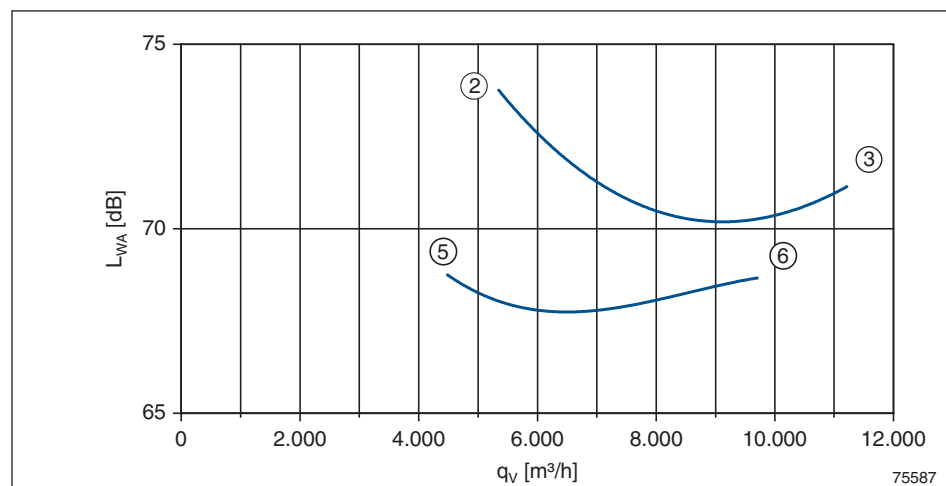

gemessen in Volldüse ohne
Berührschutz in Einbauart A
nach ISO 5801
measured in full bell mouth without
guard grille in installation type A
according to ISO 5801

Maßblatt / Dimension sheet

Typ Type	Artikel-Nr. Article no.	Bauform Design	Luftförderrichtung Airflow direction	Gewicht Weight	Anschlussschaltbild Connection diagram	Maßblatt Dimension sheet	Seite Page
FN063-SDA.4I.A7P1	141 381	A	A	11 kg	108XB	L-KL-2656	63
FN063-SDQ.4I.A7P1	141 382	Q	A	25 kg	108XB	L-KL-2660	64
FN063-SDA.4I.V7P1	141 383	A	V	11 kg	108XA	L-KL-2657	65
FN063-SDK.4I.V7P1	141 384	K	V	15 kg	108XA	L-KL-2659	66
FN063-SDQ.4I.V7P1	141 385	Q	V	24 kg	108XA	L-KL-2661	67
FN063-SDF.4I.V7P1	141 386	F*	V	20 kg	108XA	L-KL-2662	68
FN063-SDF.4I.V7P1	141 387	F**	V	21 kg	108XA	L-KL-2658	69

* ohne Berührschutz / without guard grille

** mit Berührschutz / with guard grille