

FE2owlet


FN063-6E_.4I_.7P1

Leistungsdaten Performance data

1~ 230V ±10% 50Hz


P_1	0,67	kW
I	3,1	A
n	870	min ⁻¹
I_A	5,3	A
ΔI	5	%
C_{400V}	12	μF
t_R	70	°C

Kennliniendaten Characteristic data

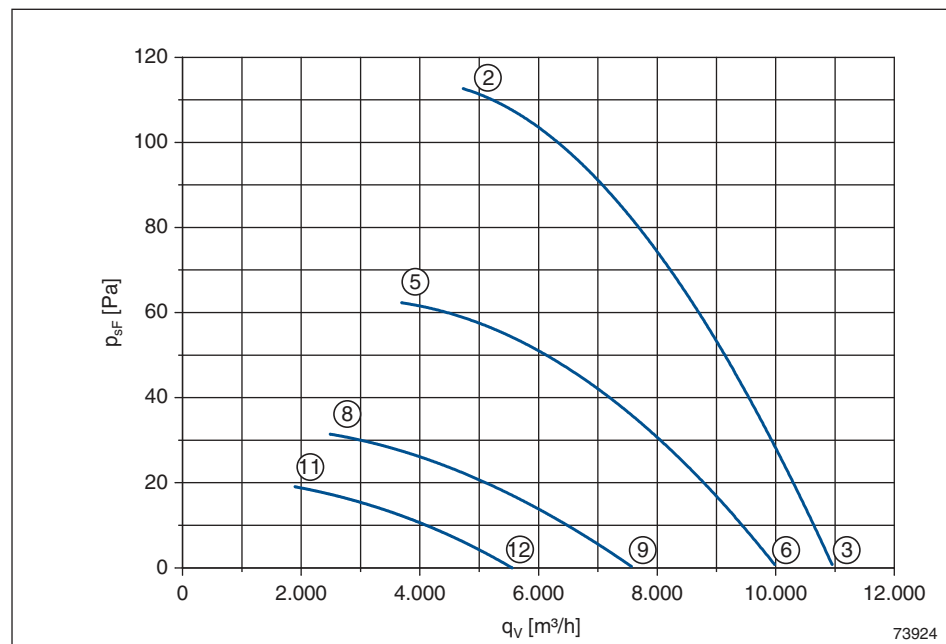

	U V	I A	P ₁ W	n min ⁻¹
②	230	3,1	670	870
③		2,3	500	930
⑤	170	3,2	500	640
⑥		2,4	390	840
⑧	135	2,8	330	450
⑨		2,5	310	640
⑪	110	2,3	220	340
⑫		2,2	220	470

$$p_{d2} = 4,6 \cdot 10^{-7} \cdot q_v^2$$

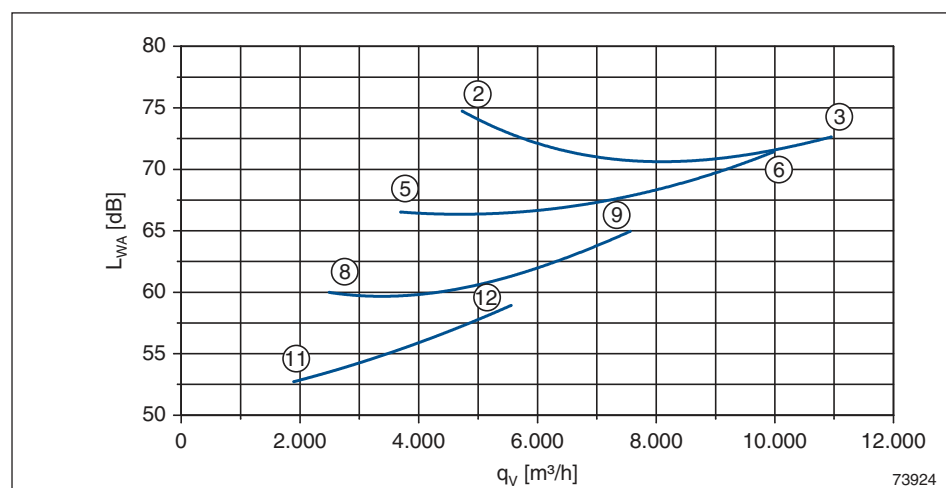

gemessen in Volldüse ohne
Berührschutz in Einbauart A
nach ISO 5801
measured in full bell mouth without
guard grille in installation type A
according to ISO 5801

Maßblatt / Dimension sheet

Typ Type	Artikel-Nr. Article no.	Bauform Design	Luftförderichtung Airflow direction	Gewicht Weight	Anschlussschaltbild Connection diagram	Maßblatt Dimension sheet	Seite Page
FN063-6EA.4I.A7P1	141 722	A	A	11 kg	104XB	L-KL-2656	63
FN063-6EQ.4I.A7P1	141 723	Q	A	25 kg	104XB	L-KL-2660	64
FN063-6EA.4I.V7P1	141 724	A	V	11 kg	104XA	L-KL-2657	65
FN063-6EK.4I.V7P1	141 725	K	V	15 kg	104XA	L-KL-2659	66
FN063-6EQ.4I.V7P1	141 726	Q	V	22 kg	104XA	L-KL-2661	67
FN063-6EF.4I.V7P1	141 727	F*	V	20 kg	104XA	L-KL-2662	68
FN063-6EF.4I.V7P1	141 728	F**	V	21 kg	104XA	L-KL-2658	69

* ohne Berührschutz / without guard grille

** mit Berührschutz / with guard grille