

FE2owlet


FN045-6E_.4F_.7P1

Leistungsdaten Performance data

1~ 230V ±10% 50Hz


P_1	0,19	kW
I	0,9	A
n	910	min ⁻¹
I_A	2,5	A
ΔI	20	%
C_{400V}	6	μF
t_R	70	°C

Kennliniendaten Characteristic data

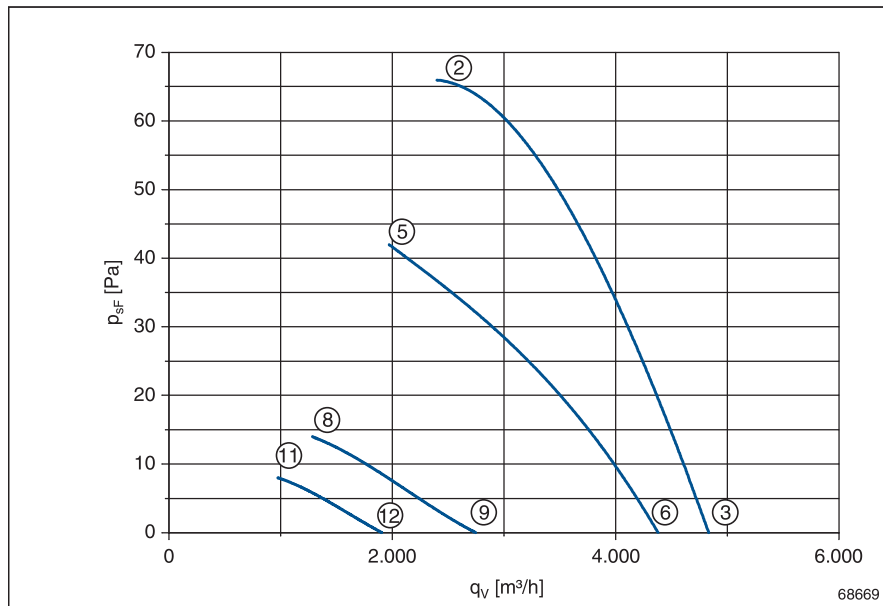

	U V	I A	P ₁ W	n min ⁻¹
②	230	0,9	190	910
③		0,78	160	930
⑤	170	0,93	140	800
⑥		0,84	130	840
⑧	135	0,96	100	420
⑨		0,93	100	530
⑪	110	0,79	70	310
⑫		0,78	70	370

$$p_{d2} = 1,8 \cdot 10^{-6} \cdot q_v^2$$

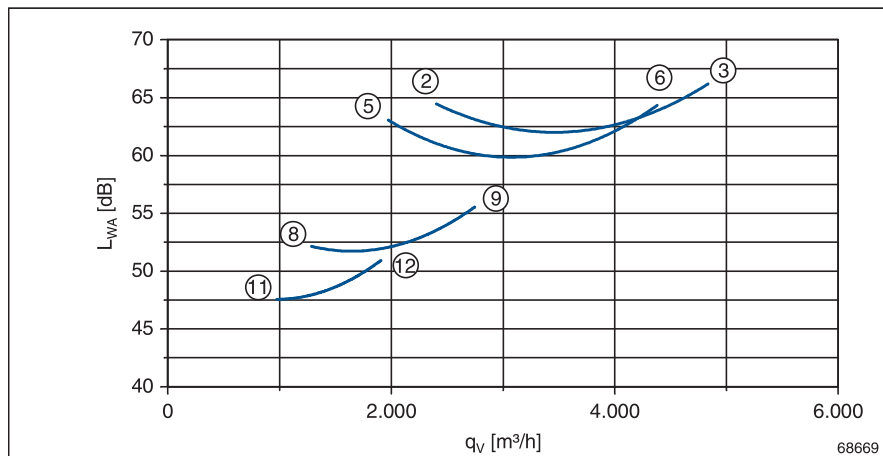

gemessen in Volldüse ohne
Berührschutz in Einbauart A
nach ISO 5801
*measured in full bell mouth without
guard grille in installation type A
according to ISO 5801*

Maßblatt / Dimension sheet

Typ Type	Artikel-Nr. Article no.	Bauform Design	Luftförderichtung Airflow direction	Gewicht Weight	Anschlusschaltbild Connection diagram	Maßblatt Dimension sheet	Seite Page
FN045-6EA.4F.A7P1	140 105	A	A	9,1 kg	104XB	L-KL-2656	26
FN045-6EQ.4F.A7P1	140 109	Q	A	15 kg	104XB	L-KL-2660	27
FN045-6EA.4F.V7P1	140 101	A	V	9,1 kg	104XA	L-KL-2657	28
FN045-6EK.4F.V7P1	140 113	K	V	11 kg	104XA	L-KL-2659	29
FN045-6EQ.4F.V7P1	140 117	Q	V	14 kg	104XA	L-KL-2661	30
FN045-6EF.4F.V7P1	140 537	F*	V	14 kg	104XA	L-KL-2662	31
FN045-6EF.4F.V7P1	140 541	F**	V	15 kg	104XA	L-KL-2658	32

* ohne Berührschutz / without guard grille

** mit Berührschutz / with guard grille